

---

Ready to Wear

Porcelain Stone®

---

# AMERICAN

*Distinctly American. Uniquely Crossville.*



---

# Ready to Wear

---

## Porcelain Stone<sup>®</sup>

### Tailored for Everyday Style

Like your favorite pair of jeans, this tile has style that can dress up - or down - to suit any look. Patterned with classic warp and weft texture and tone, Crossville's Ready to Wear Porcelain Stone collection brings touchable, everyday style to floors and walls. A full line of smart-casual shades—including Buttoned Up, Off the Cuff, Smarty Pants—speak to a relaxed-yet-refined sensibility that's effortlessly fashionable and refreshingly approachable.

12x24 calibrated field tiles are complimented by 2x6 tiles perfect for floor or wall as well as trim pieces to finish out the look. Monochromatic schemes are effortlessly chic, or mix-and-match to show your creative side. Either way, these tiles are tailor made for the best in design.

Ready to Wear is made in the U.S.A. through Crossville's EcoCycle Tile Process™, it contains a minimum 4% recycled content and is Green Squared Certified—a beautifully responsible selection for your next design project.



AV311 ▶ Buttoned Up 12 x 24 and 3 x 24 UPS



# Color Palette

## Colors

### Cools



**AV312** ▶ Hand in Glove



**AV314** ▶ Perfect Fit



**AV316** ▶ Smarty Pants



**AV317** ▶ Flannel Suit




**AV312** ▶ Hand in Glove 12 x 24 UPS

# Color Palette

## Colors

### Warms

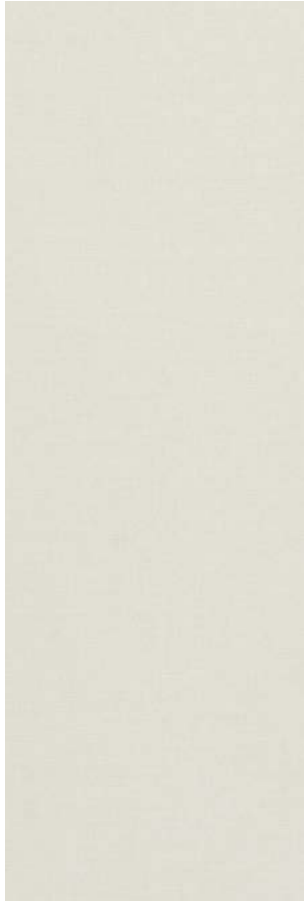

**AV311** ▶ Buttoned Up



**AV313** ▶ Off the Cuff



**AV315** ▶ Decked Out



**AV318** ▶ Hats Off



**AV315** ▶ Decked Out 12 x 24 UPS, Glass Blox GB12 1/2 x 2 Blend

# Specifications

## Sizes (Available in all colors)



12 x 24



2 x 6



**AV311** ▶ Buttoned Up 12 x 24 and 3 x 24 UPS finish



**AV314** ▶ Perfect Fit 12 x 24 UPS

## Sizes & Finishes

### Field Tile

Nominal (in)	Actual (in)	Thickness (in)	Finish
2 x 6	1-13/16 x 5-13/16	3/8	UPS
12 x 24	11-13/16 x 23-13/16	3/8	UPS

Crossville recommends a grout joint of 3/16" to 1/4"  
Actual measurements stated in inches indicate tile is calibrated (non-rectified).  
Actual measurements stated in mm indicate tile is rectified.

### Coordinating Trim

Nominal (in)	Actual (in)	Thickness (in)	Finish
4 x 24 Single Bullnose	3-13/16 x 23-13/16	3/8	UPS



4 x 24 Single Bullnose

## Product Performance


Breaking Strength	>450 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance	Unaffected	ASTM C650
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.20%	ASTM C373
Scratch Hardness	7	Mohs Scale

## Wet Dynamic Coefficient of Friction Range

UPS	0.50 - 0.60	AcuTest <sup>sm</sup>
-----	-------------	-----------------------

## Shade & Texture Index

Ready to Wear has a shade variation of V2.



This porcelain tile product is produced with a V2 variation. Expect that the amount of color and texture on each piece may vary slightly. Inspect the product upon delivery and for best results, blend tile from several cartons during installation.

## Get Planked!™

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment.

See website for more details and sizes.



### Environmentally Conscious

Ready to Wear<sup>®</sup> is made using Crossville's EcoCycle Tile Process<sup>™</sup>, it contains a minimum 4 percent pre-consumer third-party recycled content and is Green Squared<sup>®</sup> Certified. Through these recycling processes Crossville recycles nearly 12 million pounds of previously discarded filtrate and fired tile waste. In addition to its own fired waste recycling, Crossville also accepts and recycles reclaimed, previously installed tile through its Tile Take-Back<sup>™</sup> Program. For more information, visit [CrossvilleInc.com/green](http://CrossvilleInc.com/green).

### Recommended Use

Ready to Wear is recommended for interior walls and floors and exterior walls in both commercial and residential applications. If offset pattern is required for tiles 15 inches or longer, Crossville<sup>®</sup> recommends an offset of not greater than 33%. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage. See [CrossvilleInc.com](http://CrossvilleInc.com) for detailed installation instructions.

### Care and Maintenance

Regular cleaning is the best way to keep Ready to Wear tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville<sup>®</sup> products is available at [CrossvilleInc.com](http://CrossvilleInc.com).

### Our Warranty

Crossville Inc. guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1-2012 and in the performance data section of the Crossville, Inc. general product catalog. For complete details check our website at [CrossvilleInc.com](http://CrossvilleInc.com).

*Information listed here is subject to change. Please refer to [CrossvilleInc.com](http://CrossvilleInc.com) for the latest, most accurate information.*

### Hydrotect

Our porcelain tiles are available with Hydrotect. Crossville's revolutionary invisible coating harnesses the power of light, water, and oxygen to create the best defense against dirt and pollution. Whether indoors or out, floors and walls stay cleaner, providing a superior experience in any space. For complete details check our website at [CrossvilleInc.com](http://CrossvilleInc.com).



### Trade Organizations



### Environmentally Aware



# Ready to Wear Porcelain Stone<sup>®</sup>

Crossville, Inc.

PO Box 1168  
Crossville, TN  
38557

Phone 931.484.2110  
Fax 931.456.2956  
E-Mail [Crossc@CrossvilleInc.com](mailto:Crossc@CrossvilleInc.com)  
Web [CrossvilleInc.com](http://CrossvilleInc.com)



Floor: **AV316** ▶ Smarty Pants 12 x 24 UPS  
Wall: **AV311** ▶ Buttoned Up 2 x 6 UPS  
Cover: **AV317** ▶ Flannel Shirt 12 x 24 UPS

 CROSSVILLE<sup>®</sup>